Our Product List

Interior Top Coat

Laxto Luxury Emulsion Acrylic Distemper White / Ready Shades Pouch Distemper

Exterior Top Coat

Premium Exterior Emulsion Star Divine Weather Proof Exterior Emulsion

• 2 in I Series

Laxto Satin Emulsion (Exterior/ Interior) Signature Advance Primer Signature 2 in 1 Emulsion Signature Primer Enjoy Shine Emulsion (Exterior/ Interior) Enjoy Emulsion (Exterior/ Interior) Enjoy Primer (Exterior/Interior) All Rounder Emulsion

Metallics

Star Gold Premium Metallics Gold / Silver

Water Proofing Damp Proof Turbo

Base Coat

Laxto Premium Base Coat Exterior Primer (4 options) Interior Primer

Wall Putties

Cement Base Wall Putty Acrylic Wall Putty

Enamel

Semi-Gloss Water Base Luxury Enamel High Gloss Enamel Solvent Base

Solvent Series

Universal Primer Red Oxide Metal Primer Zinc Yellow Primer Hammer Tone Black Japan Black Board Paint Floor Coat Red

Tinters

Machine Colourants **Universal Stainers**

Texture

Rough and Tough Texture **Dholpur Texture**





Ek Rang Jo Duniya Pechane...







• A • B • O • U • T •

AKASH COLOUR

Akash Colour Industries was established in 2009, in a small rented unit in Jaysingpur, Kolhapur with a production capacity of 50 tons per month of cement base, water base & oil base paints, with the ambition to provide good quality products and service to the paint market. Within a year's span it was realized that the current production capacity was not fulfilling the market requirements, so a new unit with a production capacity of 300 tons per month was set up.

The fortunes of the company shined as in 2017 the Company got certified with an ISO 9001:20015 certification.

Our ability to combine high performance with elegance has led to a wide range of eye-catching paints that deliver clear, authentic to feel natural breath atmosphere. We continue to exceed our customers' expectations time & again by using only the highest & best quality raw materials in every product we manufacture. That commitment to quality is visible and durable wherever our Paint system is found.

We are committed to innovate the products required for today's Market. Our Company believes in change. We are continuously adding new and innovative range of products to improve the overall quality of all the products manufactured by us.











Laxto Luxury Emulsion


Laxto Luxury Emulsion is prepared with high quality acrylic binder and micro fined pigments and silicon additives. Which gives excellent washability. It gives your wall high shine and rich finish. It has excellent brushability that gives your wall an exquisite look and cream smooth finish.





Laxto Satin Emulsion

Laxto Satin Emulsion gives your walls rich satin finish, it is fully washable with excellent satin resistant properties, which helps to maintain the beauty of your home for years, inside & outside.

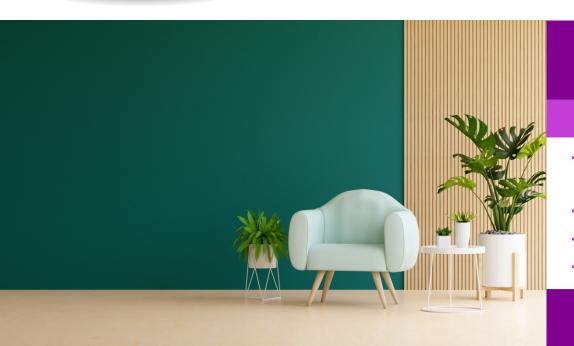

Features & Benefits:

- Premium paint with excellent washability
- Easy to apply
- High shine & rich finish
- Silicon coating

Features & Benefits:

- · High Gloss Finish.
- · Excellent Washability.
- Highly Durable / Long Life.
- Suitable For Interior & Exterior.

COVERAGE

140 to 160 sq.ft/ltr/coat on smooth and non-absorbent surface.

WASHABLE Semi Washable THINNING

40 - 50 % by volume using water.

RECOATINGMin. Interval of 5 to 6 hours.

DRYING TIME
Surface Dry:
30 to 45 minutes.

GLOSS LEVEL / SHEEN LEVEL High Sheen COVERAGE

130 to 150 sq.ft/ltr/coat on smooth and non-absorbent surface

WASHABLE

THINNING 30 - 40 % by volume

using water.

RECOATINGMin. Interval of 6 - 8 hours.

DRYING TIME Surface Dry: 45 minutes

GLOSS LEVEL / SHEEN LEVEL High Gloss Finish

INTERIOR COLOUR





Star Max Divine Acrylic Distemper


Star Max Divine Acrylic Distemper is made using high quality extenders & binders to give your wall excellent matt finish. Available in tintable form and in various ready shades to give your wall cool eye soothing finish.





Sun Gold Acrylic Distemper

Sun Gold Acrylic Distemper is a water based acrylic paint designed for interior walls. Available in a tintable form, it gives surfaces an elegant and matt finish. It gives you great whiteness amongst the distemper category, thereby keeps your wall beautiful.

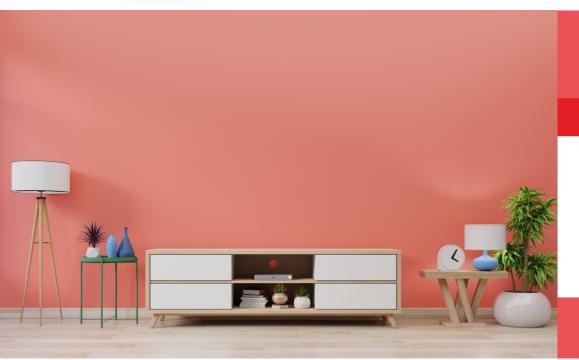

Features & Benefits:

- Provide Beautiful Wall With Effective Colour Shade.
- Better Washability.
- Easy To Apply.
- Suitable For Interior Use Only.



Features & Benefits:

- **Economical Product with Optimum Performance**
- Easy to apply
- · Suitable for interior use only.

COVERAGE

80 to 90 sq.ft/kg/coat on smooth and non-absorbent surface

> WASHABLE SEMI

THINNING

30 - 40 % by volume using water.

RECOATING

Min. Interval of 6 to 8 hours.

DRYING TIME Surface Dry:

45 minutes

GLOSS LEVEL / SHEEN LEVEL Great Matt Finish

COVERAGE 80 to 90 sq.ft/kg/coat on smooth

and non-absorbent surface

WASHABLE

RECOATING

Min. Interval of 6 to 8 hours.

THINNING

30 - 40 % by volume

using water.

DRYING TIME Surface Dry:

45 to 60 minutes

GLOSS LEVEL / SHEEN LEVEL Great Matt Finish

INTERIOR COLOUR





Shagun Distemper

Shagun Distemper is economy distemper designed for interior walls. Available in a tintable format, it gives surfaces a smooth matt finish.





Shagun Pouch Distemper

Shagun Pouch Distemper is interior topcoat available in various shades at affordable price which give your wall beautiful matt finish.



Features & Benefits:

- Economical Product with smooth finish
- Easy to apply
- Suitable for interior use only.

Features & Benefits:

- Various ready shades to choose from.
- Easy to apply.
- Very affordable price.
- Good hiding.

COVERAGE

70 to 80 sq. ft/kg/coat on smooth and non-absorbent surface

WASHABLE

THINNING

40 - 50 % by volume using water.

RECOATINGMin. Interval of 6 to 8 hours.

DRYING TIME Surface Dry: 45 minutes

GLOSS LEVEL / SHEEN LEVEL

Matt Finish

COVERAGE 50 to 60 sq. ft/kg/coat on smooth

and non-absorbent surface

WASHABLE NO THINNING 30 - 40 % by volume

using water.

RECOATINGMin. Interval of 6 to 8 hours.

DRYING TIME
Surface Dry:
45 minutes

GLOSS LEVEL / SHEEN LEVEL

Matt Finish

INTERIOR COLOUR





Ultimate Premium Exterior Emulsion

Ultimate Premium Exterior Emulsion is anti-algal, Water-based, 100% acrylic emulsion with anti - dust technology that offers rich look to your exterior walls.





Star Divine Weather Proof Exterior Emulsion

Star Divine Weather Proof Exterior Emulsion is long lasting, water-based premium and high performance paint to give your walls a long lasting & all weather protection.



Features & Benefits:

- · Excellent resistance to ultraviolet radiation.
- Excellent Dirt Pick up Resistance
- Excellent sheen, giving your newly painted home a classy
- Ensures brighter, cleaner shades that will last longer.



Features & Benefits:

- Premium Exterior Emulsion with **Excellent Washability**
- Easy to apply
- Suitable for exterior surface.
- All Weather Protection
- Made From High Quality Acrylic Resin

COVERAGE

140 to 150 sq. ft/kg/coat on smooth and non-absorbent surface

> WASHABLE YES

THINNING 30 - 40 % by volume

using water.

RECOATING

Min. Interval of 6 to 8 hours.

DRYING TIME Surface Dry: 45 to 60 minutes

GLOSS LEVEL / SHEEN LEVEL Visible Shine

COVERAGE

130 to 140 sq. ft/kg/coat on smooth and non-absorbent surface

WASHABLE

RECOATING Min. Interval of 6 to 8 hours.

DRYING TIME Surface Dry: 30 to 45 minutes

GLOSS LEVEL / SHEEN LEVEL Visible Shine

EXTERIOR COLOUR

EXTERIOR COLOUR

THINNING

30 - 40 % by volume

using water.





Star Divine Luxury Enamel / Semi Gloss

Star Divine Luxury Enamel has a rich soft Shine finish with excellent washability and stain resistance property that enhances the visual appeal on applied surface. It can be used on different kind of surfaces. Its highly durable water based paint and it has excellent brushability.





Star Gold Premium Metallics

Star Gold Metallic paints are prepared with acrylic binders & micro fine pearl pigments with suitable additives to give a beautiful sparkling effect. Should be applied in two to three coats after application of a suitable primer for great effect. Gives a sparkling, pleasant effect & hence also called effect paints.



Features & Benefits:

- Excellent flow and brushability
 Can be applied on different surfaces
- Super Whiteness
- High Shine
- · Excellent Washability



Features & Benefits:

- · Available in Gold, Silver.
- Ideal for application on wood, cement concrete, Paper & for clay idols wood
- Suitable for Interiors/Exteriors

COVERAGE

120 to 130 sq.ft/ltr/coat on smooth and non-absorbent surface

WASHABLE

THINNING 30 - 40 % by volume

0 - 40 % by volume using water.

RECOATINGMin. Interval of 6 - 8 hours.

DRYING TIME
Surface Dry:

GLOSS LEVEL / SHEEN LEVEL High Shine COVERAGE
75 to 80 sq.ft/ltr/coat on
smooth and non-absorbent surface

WASHABLE

THINNING 30 - 40 % by volume using water

RECOATING

Min. Interval of 6 to 8 hours.

DRYING TIME Surface Dry: 60 minutes

GLOSS LEVEL / SHEEN LEVEL GLOSSY





Enjoy Shine 2 in 1 Emulsion


Enjoy shine 2 in 1 emulsion gives a great shiny finish to the wall. It is the perfect option to make a smart upgrade from distempers or matt finish economy emulsions. It gives higher coverage as compared to distemper or economy emulsions, so you need less material.





Enjoy 2 in 1 Emulsion

Enjoy 2 in 1 emulsion saves your time, effort & money as it is easy to apply & suitable for interior & exterior surface, available at very reasonable price specially for high performance water based coating for your wall.

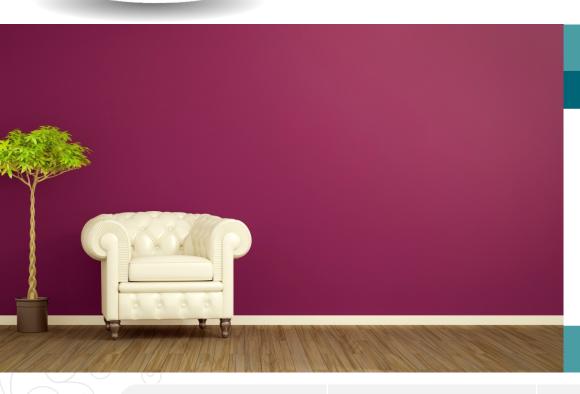

Features & Benefits:

- Affordable paint with medium washability
- Easy to apply
- Suitable for interior & exterior
- · Soft Shine & Rich finish
- Good Coverage as compared to distemper.



Features & Benefits:

- Suitable for interior & exterior wall.
- Better alternative for cement paint / distempers.
- Affordable paint with medium washablity.
- Resistant to chalking.
- Also available in various shades.

COVERAGE

120 to 130 sq.ft/ltr/coat on smooth and non-absorbent surface

WASHABLE Semi Washable THINNING 30 - 40 % by volume

30 - 40 % by volume using water.

RECOATINGMin. Interval of 6 to 8 hours.

DRYING TIME
Surface Dry:
30 to 45 minutes

GLOSS LEVEL / SHEEN LEVEL Low Shine COVERAGE
110 to 120 sq.ft/ltr/coat on smooth

and non-absorbent surface

WASHABLE Semi Washable THINNING 30 - 40 % by volume

using water.

RECOATING
Min. Interval of 6 to 8 hours.

DRYING TIME
Surface Dry:
30 to 45 minutes

GLOSS LEVEL / SHEEN LEVEL
Rich Matt Finish





Signature Interior / Exterior Emulsion

Signature Interior/exterior emulsion is perfect paint to move on from traditional cement paint & distempers. It is resistant to chalking & available at very affordable price.





Allrounder Emulsion

All Rounder Emulsion is self priming interior exterior topcoat which gives your walls rich matt finish at very affordable coats. It save your time & money by eliminating the use of primers. It is available in tintable format and one ready shade, i.e, terracotta



Features & Benefits:

- Suitable for interior & exterior.
- Affordable price.
- Easy to apply.
- A perfect alternative to traditional cement paint & distempers.



Features & Benefits:

- Faster & Convenient To Apply.
- Self Priming Technology
- · Save Cost & Time.
- Affordable Replacement For Cement Paint & Distempers.
- Tintable

COVERAGE

110 to 120 sq.ft/ltr/coat on smooth and non-absorbent surface

WASHABLE Semi Washable THINNING 30 - 40 % by volume

using water.

RECOATINGMin. Interval of 6 to 8 hours.

DRYING TIME
Surface Dry:
30 to 45 minutes

GLOSS LEVEL / SHEEN LEVEL
Rich Matt Finish

COVERAGE 60 to 70 sq.ft/kg/coat on smooth and non-absorbent surface

> WASHABLE Semi Washable

THINNING 30 - 40 % by volume using water.

RECOATING

Min. Interval of 6 to 8 hours.

DRYING TIME Surface Dry: 30 to 45 minutes

GLOSS LEVEL / SHEEN LEVEL Low Shine





Damp Proof Turbo

Damp Proof Turbo is formulated using polyester fibers and elastomeric emulsions. Purpose of the paint is to provide ultimate waterproofing. After drying paint gives a thick and durable coat which fulfills the purpose of waterproofing.





Laxto Interior / Exterior Premium Base Coat

Laxto interior exterior Base coat is high quality base coats designed for interior as well as exterior surfaces to provide best in class adhesion, resistance to alkali and primary efflorescence. It provides excellent opacity to walls which helps your final top coat to give premium finish & high coverage.



Features & Benefits:

- Ultimate waterproofing
- Super adhesion
- · Crack Bridging
- High Sheen
- · Excellent whiteness
- Elasticity in paint



Features & Benefits:

- High Opacity
- Super Brushability
- Excellent Whiteness
- · Resistant to Chalking
- Excellent Adhesion

COVERAGE
00 1210 102

Horizontal waterproofing 30 sqft/2 coats Vertical waterproofing 55 sqft/2 coats

> WASHABLE YES

THINNING

30 - 40 % by volume using water for 1st coat, No dilution in 2nd coat

RECOATING

Min. Interval of 6 to 8 hours.

DRYING TIME Surface Dry:

45 minutes

GLOSS LEVEL / SHEEN LEVEL High Sheen

COVERAGE 125 to 140 sq. ft/ltr/coat on smooth

and non-absorbent surface

WASHABLE

THINNING 50 - 60 % by volume

using water.

RECOATING Min. Interval of 6 - 8 hours.

DRYING TIME Surface Dry:

30 to 40 minutes

GLOSS LEVEL / SHEEN LEVEL Matt Finish

EXTERIOR COLOUR

EXTERIOR COLOUR





Star Divine Exterior Acrylic Primer

Star Divine Exterior Acrylic Primer is made from a high grade of acrylic binder and pigment which provides extra whiteness and excellent opacity. It protects the top coat from damage and helps to provide longer life of the total paint system. It penetrates the porous surface, reduces the absorption of the surface and as a result, top coat gives better coverage.





Star Divine Interior / Exterior Acrylic Primer

Star Divine Acrylic Primer is formulated by using acrylic binder and combination of pigments and extender to get high opacity and super whiteness. It is suitable in interior as well as exterior applications, for priming of plastered surfaces and other masonry works.



Features & Benefits:

- High Opacity
- Super Brushability
- Excellent Whiteness
- Resistant to Chalking



Features & Benefits:

- High Opacity
- Super Brushability
- Excellent Whiteness
- Resistant to Chalking

COVERAGE 100 to 110 sq. ft/ltr/coat on smooth and non-absorbent surface THINNING
50 - 60 % by volume

DRYING TIME
Surface Dry:
30 to 40 minutes

COVERAGE 100 to 110 sq. ft/ltr/coat on smooth and non-absorbent surface THINNING
50 - 60 % by volume
using water.

DRYING TIME
Surface Dry:
30 to 40 minutes

RECOATING
Min. Interval of 6 to 8 hours.

GLOSS LEVEL / SHEEN LEVEL

Matt Finish

RECOATINGMin. Interval of 6 - 8 hours.

GLOSS LEVEL / SHEEN LEVEL

Matt Finish

EXTERIOR COLOUR





Royal Interior / Exterior Primer

Royal interior / exterior primer is specially formulated premium quality acrylic primer with superior whiteness and coverage for application on interior / exterior masonry surface. Royal interior / exterior primer has a good opacity which helps to improve the appearance of the emulsion top coat.





Star gold acrylic wall putty

Star gold acrylic wall putty is water based ready to use putty, used for filling and smoothening of the plastered wall. The putty is made using high quality acrylic binders that retains a strong grip on the wall surface, so it helps in increasing the coverage of the paint and give smooth finish to your paint.



Features & Benefits:

- High Opacity
- Super Brushability
- Excellent Whiteness
- Resistant to Chalking

Features & Benefits:

- Ready to use putty
- High coverage of the paint
- It is quick drying

COVERAGE

100 to 110 sq. ft/ltr/coat on smooth and non-absorbent surface

THINNING 30 - 40 % by volume DRYING TIME
Surface Dry:
30 to 40 minutes

COVERAGE
30 to 35 sq. ft/ltr/coat on
smooth and non-absorbent surface

THINNING
If required
(by using water)

DRYING TIME Surface Dry: 25 to 30 minutes

RECOATING
Min. Interval of 6 - 8 hours.

GLOSS LEVEL / SHEEN LEVEL

Matt Finish

RECOATING
Min. Interval of 4 to 6 hours.

GLOSS LEVEL / SHEEN LEVEL

Matt Finish

INTERIOR & EXTERIOR COLOUR





Signature Advance Exterior / Interior Primer

Signature Advance Exterior / Interior primer provides value for money. Its advanced formulation provides a high opacity to priming wall giving topcoat high coverage & premium finish.





Enjoy 2 in 1 primer Signature Exterior / Interior Primer

Enjoy 2 in 1/ Signature Acrylic primer is water base primer for Interior/exterior walls and a suitable undercoat for Interior/exterior emulsions.

It gives a tough film and as a result it helps to provide longer life to Interior/exterior top coat.



Features & Benefits:

- · High opacity.
- Suitable for interior & exterior.
- Advanced formulation for better finish.
- Super brushability & excellent whiteness.



Features & Benefits:

- Economical Product with
 Optimum Performance
- Easy to apply
- Suitable for exterior /

COVERAGE
100 to 110 sq. ft/ltr/coat on smooth
and non-absorbent surface

THINNING
0 - 50 % by volume

DRYING TIME Surface Dry: 45 minutes

COVERAGE 100 to 110 sq.ft/ltr/coat on smooth and non-absorbent surface THINNING 30 - 40 % by volume using water DRYING TIME Surface Dry: 45 minutes

RECOATING
Min. Interval of 6 to 8 hours.

GLOSS LEVEL / SHEEN LEVEL
Great Matt Finish

RECOATING
Min. Interval of 6 - 8 hours.

GLOSS LEVEL / SHEEN LEVEL

INTERIOR & EXTERIOR COLOUR





Shagun Exterior Primer

Shagun Exterior Primer suitable for interior as well as exterior surface. As it can be used on interior and exterior walls, it helps you to reduce wastage and cost to make this product very budget friendly.





Shagun Interior Primer

Shagun Interior Primer is prepared with micro fined pigments along with extenders and different additives.

It is an air drying low smell primer.

It is good for masonry and asbestos interior surfaces.

It is a high whiteness primer with good chalk resistance.



Features & Benefits:

- Product with Optimum Performance
- Excellent whiteness
- Easy to apply
- Suitable for interior and exterior walls.
- Budget friendly



Features & Benefits:

Economical Product with

Optimum Performance

- Easy to apply
- Suitable for interior use only

COVERAGE

90 to 100 sq. ft/ltr/coat on smooth and non-absorbent surface

THINNING 40 - 50 % by volume DRYING TIME
Surface Dry:
45 minutes

COVERAGE
70 to 75 sq.ft/ltr/coat on smooth
and non-absorbent surface

THINNING 30 - 40 % by volume using water DRYING TIME Surface Dry: 45 minutes

RECOATING
Min. Interval of 6 to 8 hours.

GLOSS LEVEL / SHEEN LEVEL
Great Matt Finish

RECOATING
Min. Interval of 6 - 8 hours.

GLOSS LEVEL / SHEEN LEVEL

EXTERIOR COLOUR





Star Gold High Gloss Enamel

Star Gold High Gloss Enamel is tested and proven, premium quality solvent based hi-gloss enamel recommended for suitably primed interior and exterior wood, metal and walls.





Shagun High Gloss Enamel

Shagun High Gloss Enamel is tested and proven, premium quality solvent based hi-gloss enamel recommended for suitably primed interior and exterior wood, metal and walls.



Features & Benefits:

- Smooth Finish
- Good Stain Resistance
- Excellent Durability
- High Gloss

Features & Benefits:

- Smooth Finish
- Good Stain Resistance
- Excellent Durability
- High Gloss

COVERAGE

110 to 120 sq.ft/ltr/coat on smooth and non-absorbent surface

> WASHABLE YES

THINNING

30 - 40 % by volume using general purpose thinner or suitable reducer.

RECOATING

Min. Interval of 8 - 10 hours.

DRYING TIME

Surface Dry: 8 to 10 hours

GLOSS LEVEL / SHEEN LEVEL

COVERAGE

100 to 110 sq.ft/ltr/coat on smooth and non-absorbent surface

WASHABLE

THINNING

30 - 40 % by volume using general purpose thinner or suitable reducer.

RECOATING

Min. Interval of 8 - 10 hours.

DRYING TIME Surface Dry:

8 to 10 hours

GLOSS LEVEL / SHEEN LEVEL





non-absorbent surface

WASHABLE

YES

Star Gold Red Oxide Metal Primer

Star gold Red Oxide Metal Primer comes with a high corrosion resistance and also offers good opacity, coverage, flow, and leveling properties.





and non-absorbent surface

WASHABLE

Sun Gold Red Oxide Metal Primer

Sun Gold Red Oxide is an economical general purpose redoxide metal primer based on a synthetic resin medium & red oxide of iron as anti corrosive pigment.



RECOATING

Min. Interval of 8 - 10 hours..

GLOSS LEVEL / SHEEN LEVEL

RECOATING

Min. Interval of 8 - 10 hours.

GLOSS LEVEL / SHEEN LEVEL





Star Gold Solvent Primer

Star gold solvent primer (ST) is an alkyd based primer made with micro fine pigments and extenders. It is a white primer ideal for plaster surfaces and can be used on wooden surface.





Star Gold Wall Putty

Star Gold Wall Putty is a premium quality, water resistant (interior / exterior) wall putty based on portland white cement, fillers and polymers for concrete/plaster walls and ceilings. Star Gold Wall Putty can be used for smoothening and repairing of walls and ceiling surfaces. This can also be used for leveling of small undulations of substrate surface.



Features & Benefits:

- Smooth Finish
- Excellent Opacity
- Excellent Durability
- Easy Brushability
- Provides Tough Film



Features & Benefits:

- Excellent adhesion
- Very good water-resistance.
- Excellent Durability
- Not affected by UV- rays.
- Provides Tough Film
- Smooth Finish

COVERAGE

120 to 130 sq.ft/ltr/coat on smooth and non-absorbent surface

WASHABLE

THINNING

20 - 30 % by volume using general purpose thinner or suitable reducer

RECOATING
Min. Interval of 8 - 10 hours...

DRYING TIME
Surface Dry:
8 to 10 hours

GLOSS LEVEL / SHEEN LEVEL

COVERAGE 35 to 40 sq.ft/kg/coat (up to 1.5 mm thickness)

WASHABLE

THINNING 40 - 50 % by volume using water

RECOATING
Min. Interval of 6 - 8 hours

DRYING TIME Surface Dry:

GLOSS LEVEL / SHEEN LEVEL

METALLIC & WOOD COLOUR





Star Gold Machine Colourants

With the help of our skilled professionals, we are able to offer superior quality Machine Colorant. The provided colorants are well-processed with the superior grade chemical compounds and very modern techniques by our deft professionals at well-equipped chemical laboratory. Apart from this, our offered colorants are perfect for all kind of decorative paints. The higher quality pigments provide better weather resistance for exterior applications





Startint Universal Stainer

Startint is a high strength pigment concentrate used for tinting base paint to get desired shade. These stainers can be used for tinting Emulsions, Distempers, Air Drying Synthetic Enamels- Glossy, Satin or Matt finish paints.



Features & Benefits:

Ideal for in-shop and for tinting
Compatible with emulsion &
alkyd enamel
Provides excellent color
development in water and
solvent base paints.
High color strength

Features & Benefits:

- Superior tinting strength
- Can be used to tint variety of paint
- Water-soluble
- In can shelf life is great

Directions: Mix colorants properly before pouring into tinting machine. Mostly volume of colourent does not exceed 10% by volume of base paint